

# BULKLITE

## Durable Bulkhead Luminaire

The Bulklite is a durable IK10 impact rated LED emergency luminaire that can easily be configured to an Exit sign using optional directional legends.

The Bulklite is IP65 rated for ingress protection and can be either wall or ceiling mounted in a variety of applications.

### Applications



Apartments



Car Parks



Factories




Public Amenities



Schools



Sports Facilities

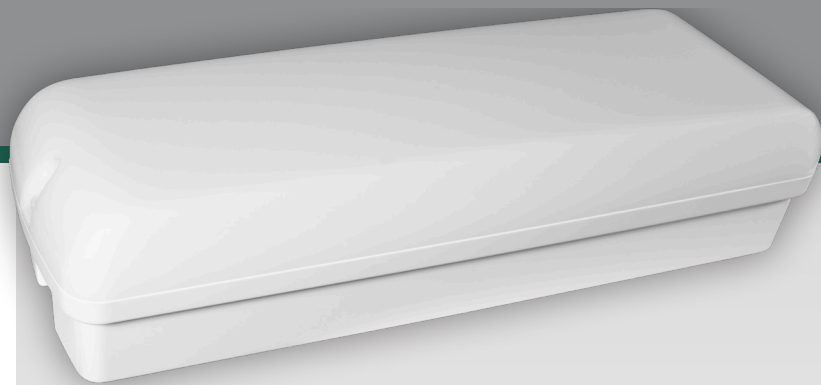

### Features and Benefits

- Tested to BS EN 60598.2.22
- Low 0.4W standby power consumption
- Wall and ceiling mount
- Lithium Iron Phosphate battery
- IP65 weatherproof
- IK10 impact protection
- Directional decals available separately



# BULKLITE

ORDERING INFORMATION	ECONOMY
Standard	EBHLED
Carton Quantity	1 piece
Weight - Net (Gross)	1.0kg
Dimensions (L x W x H)	358mm x 120mm x 82mm
Directional Options	Available separately

POWER, LAMPS AND BATTERY	ECONOMY
Power Consumption (Standby / Max)	0.4W / 2.7W
Lamp(s)	LED Module 4000K / 50,000hrs
Battery	Nickel Cadmium
Voltage (V)/Milliamp per hour (mAh)	7.2V/900mAh
Charging Method	Constant Rate <0.05C
Rated Emergency Duration (Mins)	180

TECHNICAL SPECIFICATIONS	
Operating Mode	240V
Voltage (V) Frequency (Hz)	220-240V(50Hz)
Operating Temperature	0°C to 40°C
Viewing Distance	30m
IP Rating (IP)	IP65
Impact Rating (IK)	IK10


PROTECTION	
Battery overvoltage & overcurrent protection	
Battery deep discharge protection	
Supply voltage polarity reversal protection	
Battery short-circuit protection (charging will resume upon removal of fault)	

SPARE PARTS	ECONOMY
Battery	TBC

EXIT DECALS*	ECONOMY
Up Arrow	UKH00000020201
Down Arrow	UKH00000030201
Left Arrow	UKH00000040201
Right Arrow	UKH00000050201

\*Available separately. Contact your nearest Clevertronics dealer.

LUMINAIRE CLASSIFICATION	ECONOMY
Classification	X 1 E 180

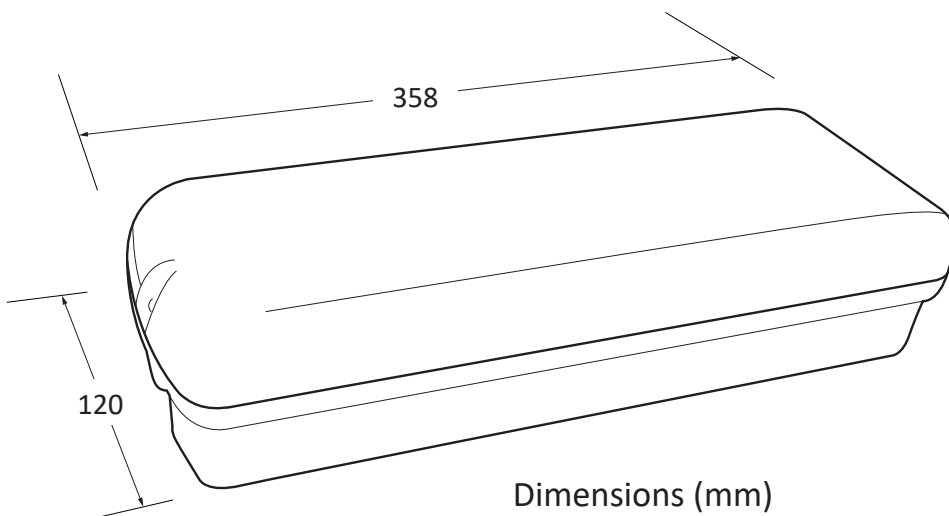

Dimensions (mm)

	UKH00000020201
	UKH00000030201
	UKH00000040201
	UKH00000050201